

MICHELIN AGRIBIB




The standard
tyre reference
on the market

www.michelinag.com



Characteristics of standard radial tyres

MICHELIN AGRIBIB

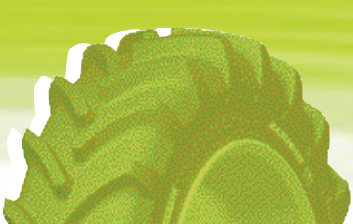

From **60**
to **170 HP**

Ø	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾	Pressure (bar) and (psi) – Load per tyre in kg ^{(3) (4) (5)}											
inches			S mm	D mm	R' mm	C.d.R. mm	inches	Bar Psi	0,8 12	1,2 17	1,6 23	1,8 26	1,9 28	2 29	2,2 32	2,4 35	2,6 38	2,8 41	
24	9.5 R24 107A8/104B TL AGRIBIB	123932	247	1040	472	3097	W8 W7	10 km/h 30 km/h 40 km/h 50 km/h	950 750 700 650	1135 895 840 775	1320 1040 980 900	1415	1460						
	11.2 R24 114A8/111B TL AGRIBIB	123864	294	1092	498	3292	W10 W9	10 km/h 30 km/h 40 km/h 50 km/h	1150 910 850 795	1375 1085 1015 940	1600 1260 1180 1090	1715	1770						
	12.4 R24 119A8/116B TL AGRIBIB	123788	324	1149	520	3420	W11 W10	10 km/h 30 km/h 40 km/h 50 km/h	1330 1050 975 915	1590 1255 1170 1080	1845 1460 1360 1250	1975	2040						
	13.6 R24 121A8/118B TL AGRIBIB	123868	366	1197	539	3559	W12 W11	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	915 1420 1120 1040 960	1095 1695 1335 1245 1140	1275 1970 1550 1450 1320	2110	2180						
	14.9 R24 126A8/123B TL AGRIBIB	123848	408	1259	561	3733	W13 W12	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1080 1660 1310 1230 1125	1285 1985 1565 1465 1340	1495 2310 1820 1700 1550	2470	2550						
	16.9 R24 134A8/131B TL AGRIBIB	123854	460	1330	586	3935	DW15L W14L DW14L W15L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1345 2080 1630 1530 1420	1605 2480 1950 1825 1685	1865 2880 2270 2120 1950	3080	3180						
28	12.4 R28 121A8/118B TL AGRIBIB	123832	322	1262	577	3764	W11 W10	10 km/h 30 km/h 40 km/h 50 km/h	1420 1120 1040 960	1695 1335 1245 1140	1970 1550 1450 1320	2110	2180						
	13.6 R28 123A8/120B TL AGRIBIB	123782	372	1308	592	3893	W12 W11	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	985 1520 1195 1120 1015	1175 1815 1430 1335 1210	1365 2110 1660 1550 1400	2255	2330						
	14.9 R28 128A8/125B TL AGRIBIB	123850	403	1358	612	4050	W13 W12	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1140 1760 1385 1295 1200	1365 2100 1660 1550 1425	1585 2445 1930 1800 1650	2615	2700						
	16.9 R28 136A8/133B TL AGRIBIB	123856	450	1427	641	4240	DW15L W14L DW14L W15L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1420 2190 1730 1615 1500	1695 2615 2065 1930 1780	1970 3040 2400 2240 2060	3255	3360						
30	380/85 R30 135A8/135B TL AGRIBIB (14,9 R30)	836509	386	1416	628	4194	W12 W13	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1195 1905 1450 1360 1360	1540 2360 1900 1750 1750	1920 2800 2300 2180 2180	3100	3250						
	16.9 R30 137A8/134B TL AGRIBIB	123870	447	1480	664	4395	DW15L W14L DW14L W15L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1460 2255 1770 1660 1545	1745 2690 2115 1980 1830	2025 3125 2460 2300 2120	3340	3450						
	420/90 R30 147A8/147B TL AGRIBIB	953332	443	1533	690	4556	DW13 W13 W14L DW14L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1495 2415 1800 1700 1700	1910 3035 2300 2175 2175	2330 3650 2800 2650 2650	2440 3950 2940 2775 2775	2495 4100 3005 2840 2840	2550 4375 2900 2990 2990	2630 4500 3210 2990 2990	2705 4500 3350 3075 3075	4560	4625	
	18.4 R30 142A8/139B TL AGRIBIB	123844	504	1550	695	4602	DW16L W15L DW15L W16L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1680 2600 2040 1905 1765	2005 3100 2440 2280 2100	2330 3605 2840 2650 2430	3855	3980						
34	320/85 R34 133A8/130B TL AGRIBIB (12,4 R34)	122760	335	1420	651	4239	W10	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	985 1610 1215 1120 1030	1275 2000 1550 1450 1320	1540 2430 1900 1750 1600	1630 2615 1980 1850 1700	1670 2710 2020 1900 1750	1715 2800 2060 1950 1800	1765 2870 2120 2005 1850	1815 2940 2180 2060 1900	3005	3075	
	380/85 R34 137A8/137B TL AGRIBIB (14,9 R34)	122781	394	1503	673	4461	W12 W13	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1275 2025 1550 1450 1450	1630 2500 2000 1850 1850	2025 3000 2430 2300 2300	3300	3450						
	420/85 R34 142A8/142B TL AGRIBIB (16,9 R34)	42716	449	1580	707	4690	DW15L W14L DW14L W15L W13	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1490 2350 1810 1690 1690	1910 2900 2325 2170 2170	2330 3450 2835 2650 2650	3800	3975						
	18.4 R34 144A8/141B TL AGRIBIB	123846	477	1662	744	4933	DW16L W15L DW15L W16L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1775 2745 2160 2015 1875	2120 3275 2580 2410 2230	2465 3805 3000 2800 2580	4070	4200						

IMPORTANT: The inflation pressure is always determined according to the load per tyre, the speed and the work to be done.

Ø	Designation	CAI	Tyre characteristics				Rim widths ⁽¹⁾	Pressure (bar) and (psi) – Load per tyre in kg ⁽³⁾ (4) (5)																	
inches			S mm	D mm	R' mm	C.d.R. mm	inches	Bar Psi	0,4 6	0,5 7	0,6 9	0,8 12	1 15	1,2 17	1,4 20	1,6 23	1,8 26	1,9 28	2 29	2,2 32	2,4 35	2,6 38	2,8 41		
36	12.4 R36 124A8/121B TL AGRIBIB	123952	318	1460	673	4363	W11 W10	10 km/h 30 km/h 40 km/h 50 km/h				1570 1230 1150 1060		1870 1470 1375 1255		2175 1710 1600 1450	2325	2400							
38	12.4 R38 125A8/122B TL AGRIBIB	123962	311	1500	691	4481	W11 W10 DW10	10 km/h 30 km/h 40 km/h 50 km/h				1615 1275 1185 1090		1930 1520 1420 1295		2245 1770 1650 1500	2400	2480							
	13.6 R38 128A8/125B TL AGRIBIB	123992	358	1565	722	4705	DW12 W11 W12	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1140 1760 1385 1295 1200		1365 2100 1660 1550 1425		1585 2445 1930 1800 1650	2615	2700							
	380/80 R38 142A8/142B TL AGRIBIB	51026	380	1578	723	4709	DW12A W12 DW12 W13 DW13	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1280 2085 1555 1460 1460		1650 2630 2005 1880 1880		2025 3170 2460 2300 2300	2100 3345 2555 2390 2390	2140 3435 2600 2430 2430	2180 3520 2650 2475 2475	2255 3700 2740 2560 2560	2330 3875 2835 2650 2650	3940	4000		
	380/95 R 38 147A8/147B TL AGRIBIB		393	1687	764	5021	W12 W13	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1070 1300 1300 1215 1215	1175 1490 1430 1335 1335	1280 1680 1555 1455 1455	1490 2065 1810 1695 1695	1700 2445 2070 1930 1930	1910 2830 2325 2580 2410	2120 3210 2580 2410 2410	2330 3595 2835 2650 2650	2425 3975 2950 2755 2755	2470 4040 3005 2810 2810	2520 4100 3060 2860 2860	2705 4355 3290 3075 3075	4485	4610			
	420/85 R38 144A8/144B TL AGRIBIB (16,9 R38)	607820	455	1676	750	4975	DW15L W14L DW14L W15L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1575 2485 1915 1800 1800		2020 3065 2460 2300 2300		2465 3650 3000 2800 2800	4015	4200							
	18.4 R38 146A8/143B TL AGRIBIB	122771	491	1770	795	5258	DW16L W15L DW15L W16L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1900 2945 2315 2160 1985		2270 3510 2760 2580 2360		2640 4075 3210 3000 2730	4360	4500							
	20.8 R38 153A8/150B TL AGRIBIB	123860	541	1844	823	5470	DW18L W16L DW16L W18L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				2310 3575 2815 2625 1985		2760 4270 3360 3140 2640		3210 4960 3910 3650 2730	5305	5480							
	520/85 R38 155A8/155B TL AGRIBIB (20,8 R38)	303668	530	1855	821	5529	DW16L W16A DD16 W18A DD18	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				2440 2200 3450 2650 2500 2500		2895 2770 4250 3450 3150 3160		3350 3410 5000 4125 3875 3875	5535	5800							
42	480/80 R42 156A8/156B TL AGRIBIB (18,4 R42)	404096	494	1858	847	5538	DW16A W16A DD16	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1890 3050 2335 2170 2170		2465 3775 3015 2810 2810		3035 4500 3690 3450 3450	3155 4750 3840 3590 3590	3215 4875 3910 3655 3655	3280 5000 3985 3725 3725	3400 5250 4130 3860 3860	3520 5500 4280 4000 4000	5750	6000		
	520/85 R42 157A8/157B TL AGRIBIB (20,8 R42)	122791	539	1945	869	5771	DW18A W18A DD18	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				2265 3650 2800 2575 2575		2950 4500 3550 3350 3350		3630 5300 4375 4125 4125	5865	6150							
46	420/80 R46 151A8/148B TL AGRIBIB	122770	410	1872	861	5555	DW13	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1630 2675 2000 1850 1700		2140 3350 2575 2430 2240		2550 4000 3150 2900 2650	2705 4310 3300 3075 2800	2780 4625 3450 3160 3180	2860 4625 3450 3250 3290	2950 5000 3550 3350 3075	3035 5000 4280 4000 3740	5075	5150		
	480/80 R46 158A8/158B TL AGRIBIB (18,4 R46)	637231	499	1948	889	5874	DW16A W16A DD16 DW16L	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				1940 3275 2445 2270 2270		2390 4075 3125 2910 2910		2840 4875 3800 3550 3550	3065 5125 3990 3725 3725	3180 5250 4080 3810 3810	3290 5375 4175 3900 3900	3515 5630 4360 4075 4075	3740 5880 4550 4250 4250	6130	6380		
	520/85 R46 158A8/155B TL AGRIBIB (20,8 R46)	122780	515	2050	920	6088	DW16A W16A, W16L DW16L W18L DW18L W18A DW18A	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				2390 3750 2910 2690 2470		3065 4600 3730 3470 3175		3740 5450 4550 4250 3875	6070	6380							
50	480/80 R50 159A8/159B TL AGRIBIB	471947	474	2056	942	6135	DW15A DW16A	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h				2075 3410 2575 2360 2360		2705 4250 3250 3075 3075		3300 5150 4000 3750 3750	3465 5575 4190 3940 3875	3550 5790 4280 4030 4000	3630 6000 4375 4125 4125	3740 6150 4500 4250 4250	3850 6300 4625 4375 4375	6400	6500		
	480/95 R 50 164A8/164B TL AGRIBIB		505	2184	987	6497	DW16B (A) DW15B (A)	40 km/h Dual 10 km/h 30 km/h 40 km/h 50 km/h	1 720 2 925 2 085	1 900 3 100 2 305	2 080 3 270 2 525 2 360 2 360	2 435 3 780 2 955 3 165 2 765	2790 4285 3385 3570 3165	3140 4795 4250 3970 3970	3495 5300 4680 4250 3970	3850 5810 4680 4375 4375	3990 6185 4850 4530 4530	4055 6370 4930 4610 4690	4125 6560 5015 4690 4690	4400 7310 5350 5000 5000					

MICHELIN
AGRIBIB




From 60
to 170 HP

■ Excellent wear life


The deepest lugs
on the market **+15 %**

Source: MICHELIN test and research center
(Ladoux)
Calculation: Average calculated on
13 popular sizes on the standard market

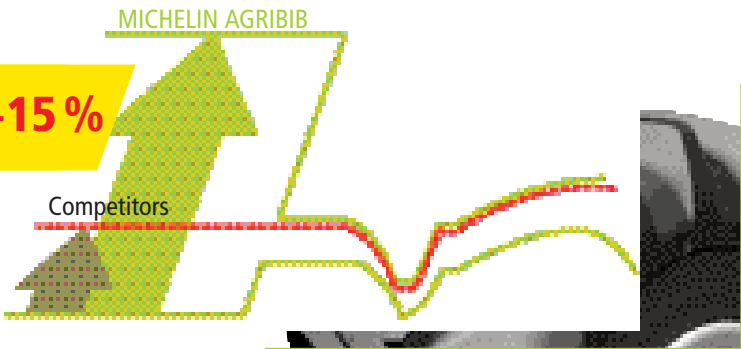

■ The highest levels of performance throughout its life

Tread pattern retained as wear progresses

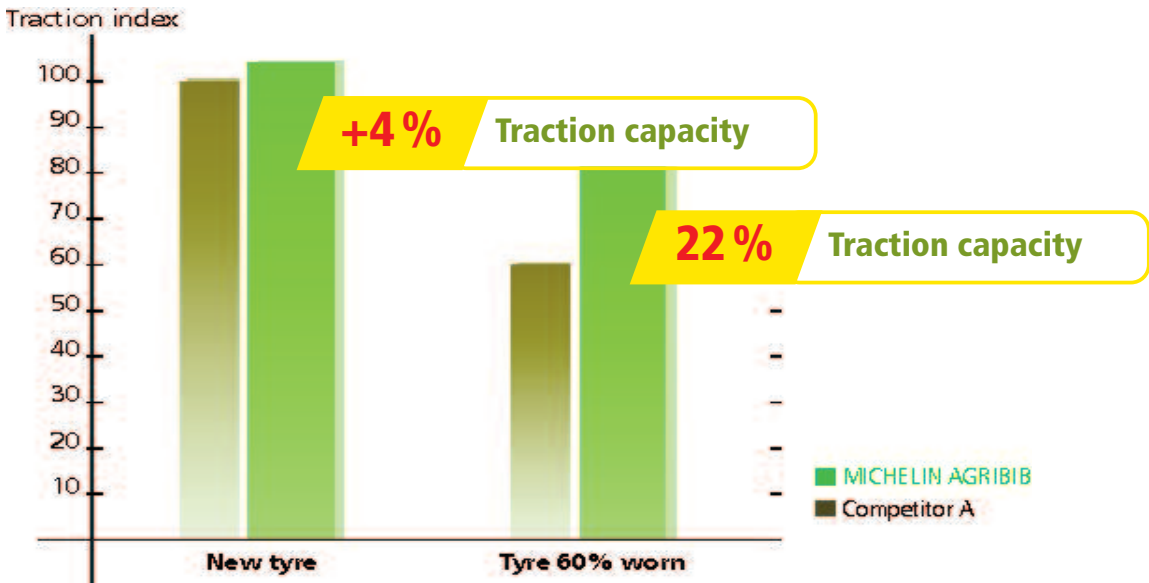

Source: Analytical test performed on the test tracks at the MICHELIN test and research center (Ladoux)
Test conditions: Clay / chalky soil – Tyre size: 18.4 R38

Sizes

9.5	R24 TL 107A8/104B	14.9	R28 TL 128A8/125B	420/85	R34 TL 142A8/142B	20.8	R38 TL 153A8/150B
11.2	R24 TL 114A8/111B	16.9	R28 TL 136A8/133B	18.4	R34 TL 144A8/141B	520/85	R38 TL 155A8/155B
12.4	R24 TL 119A8/116B	380/85	R30 TL 135A8/135B	12.4	R36 TL 124A8/121B	480/80	R42 TL 156A8/156B
13.6	R24 TL 121A8/118B	16.9	R30 TL 137A8/134B	12.4	R38 TL 125A8/122B	520/85	R42 TL 157A8/157B
14.9	R24 TL 126A8/123B	420/90	R30 TL 147A8/147B	13.6	R38 TL 128A8/125B	420/80	R46 TL 151A8/148B
16.9	R24 TL 134A8/131B	18.4	R30 TL 142A8/139B	380/80	R38 TL 142A8/142B	480/80	R46 TL 158A8/158B
12.4	R28 TL 121A8/118B	320/85	R34 TL 133A8/130B	420/85	R38 TL 144A8/144B	520/85	R46 TL 158A8/155B
13.6	R28 TL 123A8/120B	380/85	R34 TL 137A8/137B	18.4	R38 TL 146A8/143B	480/80	R50 TL 159A8/159B

The standard
tyre reference
on the market

