

Specialising in row crop applications



MICHELIN AGRIBIB Row Crop




Sizes

320/85 R38 TL 143A8/143B
320/90 R42 TL 147A8/147B
340/85 R46 TL 150A8/150B
380/90 R46 TL 157A8/157B
320/90 R50 TL 150A8/150B
380/90 R50 TL 151A8/151B
320/90 R54 TL 151A8/151B


NEW

Crop protection

- Rounded outer end of lugs

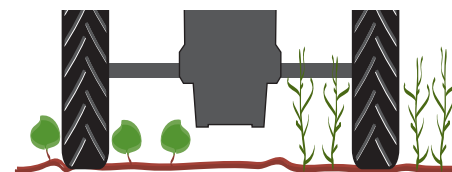

MICHELIN AGRIBIB Row Crop

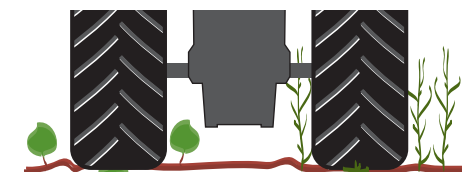

Standard

Improved traction and directional stability

- Robust crown
- Deep tread lugs



Characteristics of MICHELIN tyres for row cropping MICHELIN AGRIBIB Row Crop



Ø inches	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume litres		Pressure (bar) and (psi) – Load per tyre in kg ⁽³⁾															
			S mm	D mm	R' mm	R.C mm					Bar Psi	1.20 17	1.60 23	1.80 26	2.20 32	2.40 35	2.60 38	2.80 41	3.00 44	3.20 46	3.40 49	3.60 52	3.80 55	4.00 58		
38	320/85 R38 143A8/143B TL AGRIBIB RC	758001	315	1508	699	4514	W10 DW10A W11 DW11A		169		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 1 890 1 770 1 720 1 660 1 550	 2 330 2 260 2 110 2 050 1 980 1 850	 2 520 2 360 2 205 2 140 2 070 1 930	 2 900 2 660 2 395 2 330 2 240 2 100	 3 090 2 660 2 490 2 420 2 330 2 180	 3 200 2 780 2 600 2 530 2 440 2 280	 3 315 2 900 2 715 2 640 2 545 2 380	 3 430 3 020 2 830 2 750 2 650 2 475	 3 540 3 140 2 940 2 860 2 760 2 575	 3 700 3 230 3 025 2 940 2 840 2 650	 3 860 3 320 3 110 3 020 2 920 2 725	3 975	4 090		
42	320/90 R42 147A8/147B TL AGRIBIB RC	425361	312	1638	764	4908	DW10L W10L W9L		196		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 2 075 1 940 1 890 1 820 1 700	 2 850 2 510 2 290 2 200 2 060	 3 020 2 625 2 575 2 390 2 300 2 150	 3 370 2 850 2 705 2 600 2 500 2 340	 3 540 2 965 2 770 2 700 2 600 2 430	 3 650 3 110 2 905 2 830 2 725 2 550	 3 760 3 250 3 040 2 960 2 850 2 665	 3 865 3 395 3 170 3 090 2 975 2 780	 3 975 3 540 3 305 3 220 3 100 2 900	 4 160 3 645 3 405 3 320 3 195 2 990	 4 350 3 750 3 505 3 415 3 290 3 075	4 480	4 610		
46	340/85 R46 150A8/150B TL AGRIBIB RC (13,6 R46)	846786	338	1747	810	5227	W12 W10 DW10A W12A	791	225		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 2 260 2 110 2 050 1 980 1 850	 2 780 2 730 2 550 2 490 2 400 2 240	 3 020 2 855 2 670 2 600 2 510 2 340	 3 510 3 105 2 900 2 830 2 730 2 550	 3 750 3 230 3 020 2 940 2 840 2 650	 3 900 3 380 3 160 3 080 2 970 2 775	 4 050 3 535 3 305 3 220 3 105 2 900	 4 200 3 690 3 450 3 360 3 240 3 025	 4 350 3 840 3 590 3 500 3 370 3 150	 4 540 3 965 3 705 3 610 3 475 3 250	 4 730 4 090 3 820 3 720 3 580 3 350	4 880	5 030		
	380/90 R46 157A8/157B TL AGRIBIB RC (14,9 R46)	799905	401	1864	867	5583	W13A W12A DW13A W13 DW13 W12	835	308		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 2 810 2 620 2 550 2 460 2 300	 3 450 3 420 3 190 3 110 3 000 2 800	 3 740 3 560 3 320 3 235 3 120 2 910	 4 320 3 830 3 580 3 485 3 360 3 140	 4 610 3 970 3 710 3 610 3 480 3 250	 4 790 4 160 3 890 3 780 3 650 3 405	 4 970 4 350 4 065 3 955 3 815 3 560	 5 150 4 540 4 240 4 130 4 015 3 720	 5 330 4 730 4 420 4 300 4 150 4 000	 5 570 4 880 4 560 4 440 4 280 4 125	 5 810 5 030 4 700 4 580 4 410 4 125	6 000	6 190		
50	320/90 R50 150A8/150B TL AGRIBIB RC	130813	314	1847	862	5539	W10 W10A DW10A	816	225		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 2 260 2 110 2 050 1 980 1 850	 2 780 2 730 2 550 2 490 2 400 2 240	 3 020 2 855 2 670 2 600 2 510 2 340	 3 510 3 105 2 900 2 830 2 730 2 550	 3 750 3 230 3 020 2 940 2 840 2 650	 3 900 3 380 3 160 3 080 2 970 2 775	 4 050 3 535 3 305 3 220 3 105 2 900	 4 200 3 690 3 450 3 360 3 240 3 025	 4 350 3 840 3 590 3 500 3 370 3 150	 4 540 3 965 3 705 3 610 3 475 3 250	 4 730 4 090 3 820 3 720 3 580 3 350	4 880	5 030		
	380/90 R50 151A8/151B TL AGRIBIB RC	036849	393	1935	912	5813	DW13A DW12A W12A W13A		329		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 2 880 2 690 2 620 2 525 2 360	 3 540 3 540 3 305 3 220 3 100 2 900	 3 945 3 710 3 460 3 370 3 250 3 040	 4 555 4 040 3 780 3 680 3 540 3 310	 4 760 4 210 3 935 3 830 3 690 3 450	 4 970 5 175									
54	320/90 R54 151A8/151B TL AGRIBIB RC	272304	315	1950	915	5852	W10	816	240		10 km/h Cyc 25 km/h Cyc 30 km/h Cyc 25 km/h 30 km/h 50 km/h	 2 380 2 220 2 160 2 090 1 950	 2 930 2 880 2 690 2 620 2 530 2 360	 3 160 2 990 2 795 2 720 2 630 2 450	 3 630 3 210 3 005 2 920 2 820 2 635	 3 860 3 320 3 110 3 020 2 920 2 725	 4 020 3 480 3 260 3 170 3 060 2 855	 4 180 3 645 3 410 3 315 3 200 2 990	 4 340 3 810 3 560 3 460 3 340 3 120	 4 500 3 970 3 710 3 610 3 480 3 250	 4 690 4 090 3 820 3 720 3 585 3 350	 4 880 4 210 3 930 3 830 3 690 3 450	5 030	5 180		

⁽¹⁾ The reference rim is shown in bold type.⁽²⁾ KLEBER tube code.IMPORTANT: the inflation pressure must always be appropriate
for the load per tyre, the speed of travel and the work to be done.10 Cyc: work with cyclic loads up to 10 km/h.
25 Cyc: work with cyclic loads up to 25 km/h.
30 Cyc: work with cyclic loads up to 30 km/h.
25: use on the road up to a maximum speed of 25 km/h.
30: use on the road up to a maximum speed of 30 km/h.
50: use on the road up to a maximum speed of 50 km/h.